


# Smappee CT Hub

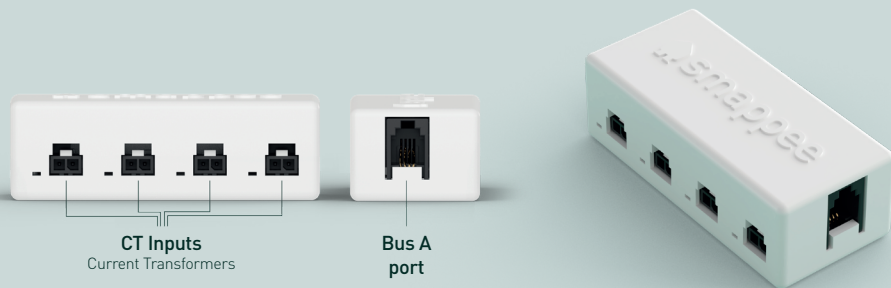

- Daisy chain up to 7 CT Hubs up to a distance of 100 meters (109 yards).
- Connect CTs and Rogowski coils to the CT Hubs.
- Measure currents up to 4,000 A.

The CT Hub is the main component of the Smappee Infinity monitoring system. You can connect up to 4 Current Transformers (CTs) or Rogowski coils to a CT Hub to measure different currents up to 4,000 A. This allows for accurate submetering of (a group of) appliances. Daisy chain several CT Hubs to measure different installations up to a distance of 100 meters (109 yards).

- **Dimensions:** 70 × 31 × 23 mm (2.75 × 1.22 × 0.90 inches)
- **Weight:** 29 g (1.02 oz)
- **Operating temperature:** -25 °C to 75 °C (-13 °F to 167 °F)
- **Storage temperature:** -25 °C to 90 °C (-13 °F to 194 °F)
- **Relative humidity:** 0 % - 95 %, non-condensing
- **Operating altitude:** 0 – 2,000 m (0 – 6,562 feet)
- **EMC:** IEC 61326-1, FCC 47 part 15
- **Safety:** IEC 61010-1:2010/COR1:2011  
Complies with UL 61010-1 and CAN/CSA-C22.2 No. 61010-1-12
- **Product certifications:** CE, FCC, CSUS (UL 61010-1), RCM
- **IP rating (IEC 60529):** IP X0
- **Connectivity:**
  - 2 × Smappee Bus A
  - 4 inputs for Smappee split core CTs (50 A, 100 A, 200 A, 400 A) and Rogowski coils (internal diameter 12 cm/4.72 inches or 19 cm/7.48 inches)
- **Included accessories:**
  - Smappee Bus cable 40 cm (15.75 inches)